
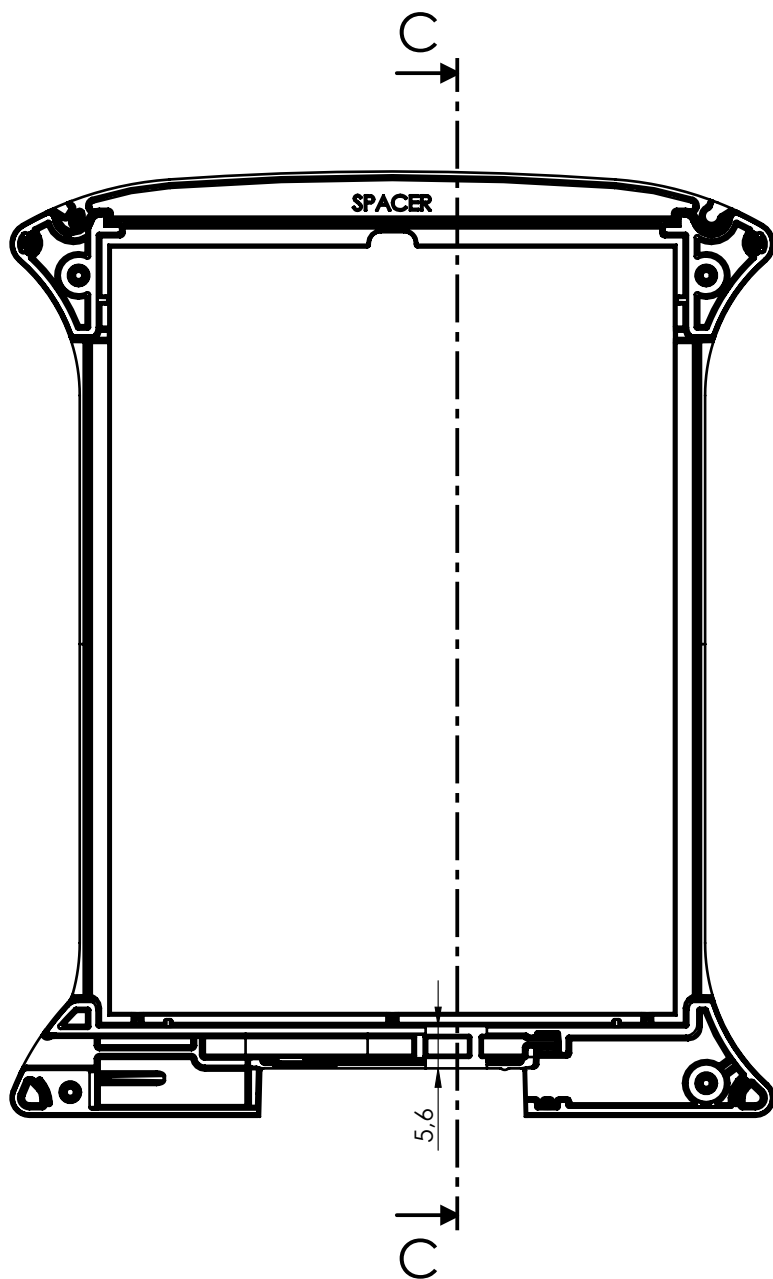

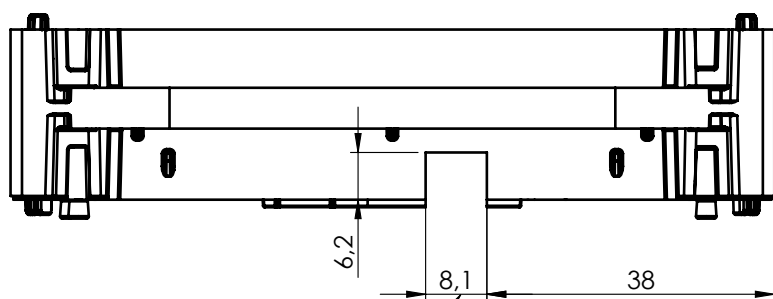


SECTION C-C



Maximum opening: 11 mm
Recommended connectors:
- SSM 6-8 pin (Samtec)
- MMS 6-8 pin (Samtec)

General Tolerance UNI EN 22768/1 Media (m)					Sheet:		
from 0.5 to 3 ± 0.1		from 3 to 6 ± 0.1	from 6 to 30 ± 0.2	from 30 to 120 ± 0.3	from 120 to 400 ± 0.5	1	
Scale: 1:1	IM: --	Drawed: D.S.	Checked: R.N.	Date: 12/05/2026	Material: PC/ABS-FR		Process: INJECTION
 Dimension in mm		The present drawing may be reproduced or communicated to 3rd parties, even partially, without the authorization of ITALTRONIC S.r.l. Italtronic reserves to protect its own rights according to the law.	Replaces the: --	Derived from:	Weight: 23.73 gr	Cod. Mold: ST.10001025	
 enclosures for electronics italtronic.com			Description: DISTANZIALE RAILBOX XT VERTICAL DEMBUS SPACER RAILBOX XT VERTICAL DEMBUS Drawing nr.: 2_110_00150			Rev.: 00	A4